


不锈钢单铰链式直输平顶链

Stainless Steel Single Hinge Straight Running Flat Top Chains

节距 P=38.1mm 812/815 系列

Pitch P=38.1mm 812/815 Series

812/815

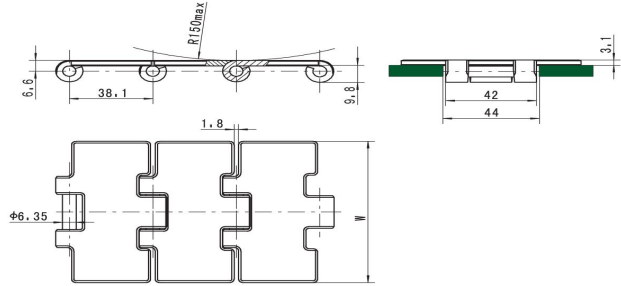

链号 Chain No.	材料 material	表面粗糙度 Surface finish μm	链板 Plate		屈服强度 Yield Strength σ _{0.2}		重量 weight	
			宽度 (Width)W		kN	lbf	kg/m	lb/ft
			mm	inch				
C12S	马氏体型铬不锈钢 Martensitic Chromium Stainless Steel	0.8	76.2	3	6.25	1,406	2.47	1.66
C13S			82.5	3 1/4			2.62	1.76
C14S			88.9	3 1/2			2.64	1.78
C16S			101.6	4			2.76	1.85
C18S			114.3	4 1/2			3.05	2.05
C20S			127	5			3.34	2.24
C24S	152.4	6	4.20	2.82				
C30S	190.5	7 1/2	5.07	3.40				
SS 812-K300	铁素体型铬不锈钢 Ferritic Chromium Stainless Steel	0.6	76.2	3	5.8	1,305	2.46	1.65
SS 812-K325			82.5	3 1/4			2.60	1.75
SS 812-K330			83.8	3 19/64			2.63	1.77
SS 812-K350			88.9	3 1/2			2.74	1.84
SS 812-K400			101.6	4			3.03	2.04
SS 812-K450			114.3	4 1/2			3.32	2.23
SS 812-K600	152.4	6	4.18	2.81				
SS 812-K750	190.5	7 1/2	5.04	3.38				
SSH 815-K300	特殊铬镍钢 Special Chromium-Nickel Steel	0.3	76.2	3	8.5	1,912	2.47	1.66
SSH 815-K325			82.5	3 1/4			2.62	1.76
SSH 815-K330			83.8	3 19/64			2.64	1.78
SSH 815-K350			88.9	3 1/2			2.76	1.85
SSH 815-K400			101.6	4			3.05	2.05
SSH 815-K450			114.3	4 1/2			3.34	2.24
SSH 815-K600	152.4	6	4.20	2.82				
SSH 815-K750	190.5	7 1/2	5.07	3.40				
SSA 815-K300	奥氏体型铬镍不锈 钢 Austenitic Chromium-Nickel Stainless Steel	0.3	76.2	3	5.6	1,260	2.51	1.70
SSA 815-K325			82.5	3 1/4			2.65	1.79
SSA 815-K330			83.8	3 19/64			2.68	1.81
SSA 815-K350			88.9	3 1/2			2.80	1.89
SSA 815-K400			101.6	4			3.10	2.09
SSA 815-K450			114.3	4 1/2			3.39	2.29
SSA 815-K600	152.4	6	4.28	2.89				
SSA 815-K750	190.5	7 1/2	5.16	3.48				

说明: 1. 链条遵循 GB/T 4140 和 DIN 8153 标准制造;

2. 同一宽度的链板有四种不同的材料可供选择, 以适应不同的工作场合;

3. 供货时, 每条链条的标准长度为 3.048m (10ft), 计 80 节。

Note: 1. These chains are built in accordance with Standard GB/T 4140 and DIN8153;

2. For the plates with a same width, there are 4 kinds of different materials to be available as an option, using to many different workplaces;


3. When supplied, the standard length of each chain is 3.048m (10ft), totaling 80 links.

不锈钢双铰链式直输平顶链

Stainless Steel Double Hinge Straight Running Flat Top Chains

节距 P=38.1mm 802/805 系列

Pitch P=38.1mm 802/805 Series

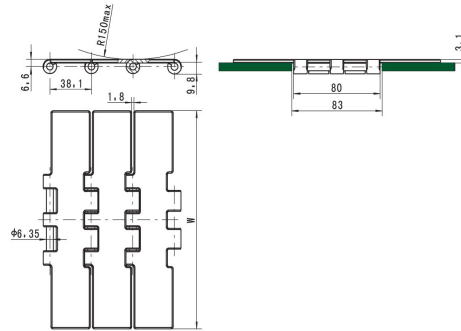

链号 Chain No.	链板 Plate			屈服强度 Yield Strength		重量 weight		
	材料 material	表面粗糙度 Surface finish μm	宽度 (Width)W		σ _{0.2}			
			mm	inch	kN	lbf	kg/m	lb/ft
C30D	马氏体型铬不锈钢 Martensitic Chromium Stainless Steel	0.8	190.5	7 1/2	12.5	2,812	5.72	3.84
SS 802-K750	铁素体型铬不锈钢 Ferritic Chromium Stainless Steel	0.6			10.3	2,317	5.68	3.82
SSH 805-K750	特殊铬镍钢 Special Chromium - Nickel Steel	0.3			15	3,374	5.72	3.84
SSA 805-K750	奥氏体型铬镍不锈钢 Austenitic Chromium - Nickel Stainless Steel	0.3			10.6	2,385	5.81	3.90

说明: 1. 链条遵循 GB/T 4140 和 DIN 8153 标准制造, 双铰链型式;

2. 与单铰链式链条相比, 具有将近 2 倍的铰链宽度, 因此拥有更高的屈服强度, 属重载链条。主要应用在堆码机和重负载的输箱机上;

3. 同一宽度的链板有四种不同的材料可供选择, 以适应不同的工作场合;

4. 供货时, 每条链条的标准长度为 3.048m (10ft), 计 80 节。

Note: 1. The chains are built in accordance with Standards GB/T 4140 and DIN 8153 and a double hinge type.

2. The Series feature a hinge width approx. twice that of single hinge chains, so they have a much higher yield strength and are a heavy-duty chains, being mainly used on palletizers and heavy crate conveyor.

3. For the plates with a same width, there are 4 kinds of different materials to be available as an option, using to many different workplaces.


4. When supplied, the standard length of each chain is 3.048m (10ft), totaling 80 links.

不锈钢单铰链式直输平顶链

Stainless Steel Single Hinge Straight Running Flat Top Chains

节距 P=38.1mm 812/815 系列

Pitch P=38.1mm 812/815 Series

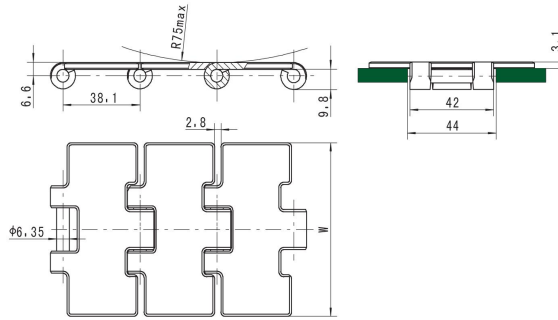

链号 Chain No.	材料 material	表面粗糙度 Surface finish μm	链板 Plate		屈服强度 Yield Strength σ _{0.2}		重量 weight	
			宽度 (Width)W		kN	lbf	kg/m	lb/ft
			mm	inch				
MS R815-K300	马氏体铬不锈钢 Martensitic Chromium Stainless Steel	0.8	76.2	3	6.25	1,406	2.45	1.65
MS R815-K325			82.5	3 1/4			2.59	1.74
MS R815-K330			83.8	3 19/64			2.62	1.76
MS R815-K350			88.9	3 1/2			2.73	1.84
MS R815-K400			101.6	4			3.01	2.02
MS R815-K450			114.3	4 1/2			3.29	2.21
MS R815-K600			152.4	6			4.13	2.78
MS R815-K750	190.5	7 1/2	4.97	3.34				
SS R812-K300	铁素体铬不锈钢 Ferritic Chromium Stainless Steel	0.6	76.2	3	5.8	1,305	2.44	1.64
SS R812-K325			82.5	3 1/4			2.58	1.73
SS R812-K330			83.8	3 19/64			2.60	1.75
SS R812-K350			88.9	3 1/2			2.72	1.82
SS R812-K400			101.6	4			2.99	2.01
SS R812-K450			114.3	4 1/2			3.27	2.20
SS R812-K600			152.4	6			4.11	2.76
SS R812-K750	190.5	7 1/2	4.94	3.32				
SSH R815-K300	特殊铬镍钢 Special Chromium-Nickel Steel	0.3	76.2	3	8.5	1,912	2.45	1.65
SSH R815-K325			82.5	3 1/4			2.59	1.74
SSH R815-K330			83.8	3 19/64			2.62	1.76
SSH R815-K350			88.9	3 1/2			2.73	1.84
SSH R815-K400			101.6	4			3.01	2.02
SSH R815-K450			114.3	4 1/2			3.29	2.21
SSH R815-K600			152.4	6			4.13	2.78
SSH R815-K750	190.5	7 1/2	4.97	3.34				
SSA R815-K300	奥氏体铬镍不锈钢 Austenitic Chromium-Nickel Stainless Steel	0.3	76.2	3	5.6	1,260	2.50	1.68
SSA R815-K325			82.5	3 1/4			2.64	1.78
SSA R815-K330			83.8	3 19/64			2.67	1.80
SSA R815-K350			88.9	3 1/2			2.79	1.87
SSA R815-K400			101.6	4			3.08	2.07
SSA R815-K450			114.3	4 1/2			3.36	2.26
SSA R815-K600			152.4	6			4.22	2.84
SSA R815-K750	190.5	7 1/2	5.08	3.42				

说明: 1. 链条遵循 GB/T 4140 和 DIN 8153 标准制造;

2. 同一宽度的链板有四种不同的材料可供选择, 以适应不同的工作场合;

3. 供货时, 每条链条的标准长度为 3.048m (10ft), 计 80 节;

4. 由于链板间的间隙为 2.8mm, 因此这种链条具有更小的反向弯曲半径。

Note: 1. These chains are built in accordance with Standards GB/T 4140 and DIN 8153.

2. For the plates with a same width, there are 4 kinds of different materials to be available as an option, using to many different workplaces..

3. When supplied, the standard length of each chain is 3.048m (10ft), totaling 80 links.


4. As the gap between plates is 2.8mm, the chains feature a much smaller backflexing radius.

不锈钢单铰链式直输平顶链

Stainless Steel Single Hinge Straight Running Flat Top Chains

节距 P=25.4mm 512/515系列

Pitch P=25.4mm 512/515 Series

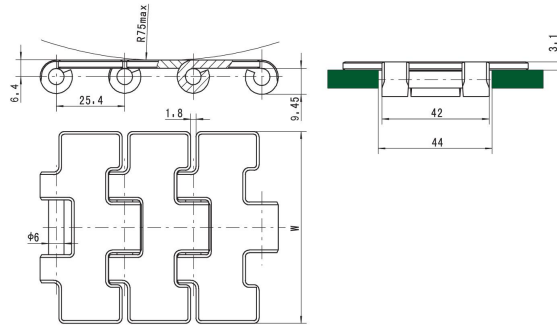

链号 Chain No.	材料 material	链板 Plate		屈服强度 Yield Strength $\sigma_{0.2}$		重量 weight		
		表面粗糙度 Surface finish μm	宽度 (Width)W		kN	lbf	kg/m	lb/ft
			mm	inch				
MS 515-K217	马氏体型铬不锈钢 Martensitic Chromium Stainless Steel	0.8	55	2 1/6	4.5	1,012	2.33	1.56
MS 515-K250			63.5	2 1/2			2.52	1.69
MS 515-K283			72	2 5/6			2.71	1.82
MS 515-K297			75.5	2 35/36			2.78	1.87
MS 515-K325			82.5	3 1/4			2.94	1.97
MS 515-K350			88.9	3 1/2			3.08	2.07
MS 515-K388			98.5	3 36/41			3.29	2.21
MS 515-K400			101.6	4			3.36	2.26
SS 512-K217	铁素体型铬不锈钢 Ferritic Chromium Stainless Steel	0.6	55	2 1/6	4.7	1,057	2.33	1.56
SS 512-K250			63.5	2 1/2			2.52	1.69
SS 512-K283			72	2 5/6			2.71	1.82
SS 512-K297			75.5	2 35/36			2.78	1.87
SS 512-K325			82.5	3 1/4			2.94	1.97
SS 512-K350			88.9	3 1/2			3.08	2.07
SS 512-K388			98.5	3 36/41			3.29	2.21
SS 512-K400			101.6	4			3.36	2.26
SSA 515-K217	奥氏体型铬镍不锈 钢 Austenitic Chromium-Nickel Stainless Steel	0.3	55	2 1/6	4.5	1,012	2.38	1.60
SSA 515-K250			63.5	2 1/2			2.57	1.73
SSA 515-K283			72	2 5/6			2.76	1.85
SSA 515-K297			75.5	2 35/36			2.84	1.91
SSA 515-K325			82.5	3 1/4			3.00	2.01
SSA 515-K350			88.9	3 1/2			3.14	2.11
SSA 515-K388			98.5	3 36/41			3.36	2.26
SSA 515-K400			101.6	4			3.43	2.30

说明: 1. 链条节距为 25.4mm, 比标准链条的节距小, 是一种紧凑性设计, 适于窄尺寸零件输送。在啤酒行业, 主要是应用在洗瓶机设备的进出瓶装置上;

2. 同一宽度的链板有三种不同的材料可供选择, 以适应不同的工作场合;

3. 供货时, 每条链条的标准长度为 3.048m (10ft), 计 120 节。


Note: 1. The pitch of the chain is 25.4mm, smaller than the one of standard chains, and it is a compact conveyor design, suitable for the transportation of narrow dimensional components. In beer industry, these chains are mainly used on bottle input and output device of bottle washing equipment.

2. For the plates with same width, there are 3 kinds of different materials to be available as an option, using to many different workplaces.

3. When supplied, the standard length of each chain is 3.048m (10ft), totaling 120 links.

不锈钢单铰链式直输平顶链 Stainless Steel Single Hinge Straight Running Flat Top Chains

节距 P=38.1mm C※S-6 系列
Pitch P=38.1mm C※S-6 Series

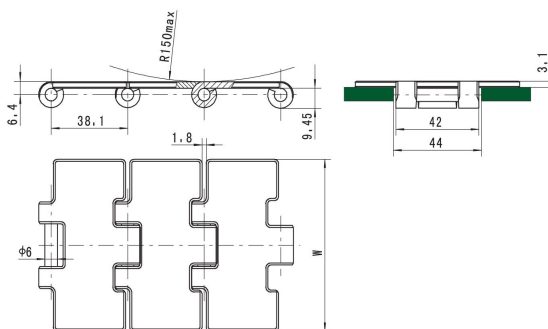

链号 Chain No.	链板 Plate			屈服强度 Yield Strength		重量 weight		
	材料 material	表面粗糙度 Surface finish μm	宽度 (Width)W		$\sigma_{0.2}$		kg/m	lb/ft
			mm	inch	kN	lbf		
C12S-6	马氏体 铬不锈钢 Martensitic Chromium Stainless Steel	0.8	76.2	3	6.25	1,406	2.43	1.63
C13S-6			82.5	3 1/4			2.57	1.73
C14S-6			88.9	3 1/2			2.71	1.82
C16S-6			101.6	4			3.00	2.02
C18S-6			114.3	4 1/2			3.29	2.21
C20S-6			127	5			3.58	2.40
C24S-6			152.4	6			4.15	2.79
C30S-6			190.5	7 1/2			5.02	3.37

- 说明: 1. 销轴直径 $\phi 6$, 铰链直径略小于 GB/T4140 标准系列, 可直接匹配使用 GB/T4140 标准链轮;
2. 此系列只适合中国市场使用;
3. 供货时, 每条链条的标准长度为 3.048m (10ft), 计 80 节。


- Note: 1. The dia. of pin is $\phi 6$, and the one. of the hinge is slightly smaller than the dia. of the one of the series chains of Standard GB/T4140, so the chains can match using the sprockets of Standard GB/T4140 directly.
2. The Series are only suitable for using on the Chinese market
3. When supplied, the standard length of each chain is 3.048m (10ft), totaling 80 links.

不锈钢双铰链式直输平顶链

Stainless Steel Double Hinge Straight Running Flat Top Chains

节距 P=38.1mm C※D-6系列

Pitch P=38.1mm C※D-6 Series

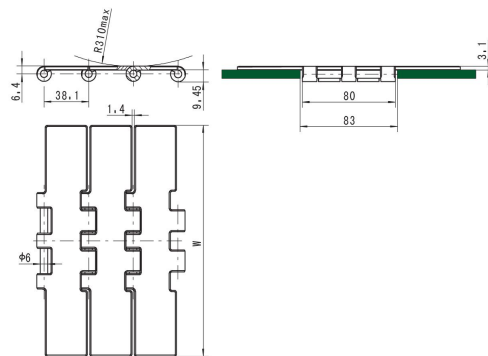

链号 Chain No.	链板 Plate			屈服强度 Yield Strength		重量 weight		
	材料 material	表面粗糙度 Surface finish	宽度 (Width)W		σ _{0.2}		kg/m	lb/ft
			mm	inch	kN	lbf		
C18D-6	马氏体 铬不锈钢	0.8	114.3	4 1/2	12.5	2,812	3.97	2.67
C24D-6	马氏体 铬镍 铬不锈钢		152.4	6			4.85	3.26
C30D-6	马氏体 铬镍 铬不锈钢		190.5	7 1/2			5.72	3.85

- 说明: 1. 销轴直径φ6, 铰链直径略小于 GB/T4140 标准系列, 可直接匹配使用 GB/T4140 标准链轮;
 2. 与单铰链式链条相比, 具有将近 2 倍的铰链宽度, 因此拥有更高的屈服强度, 属重载链条。
 主要应用在堆码机和重负载的输箱机上;
 3. 供货时, 每条链条的标准长度为 3.048m (10ft), 计 80 节。


- Note: 1. The dia. of pin is φ6, and the one of hinge is slightly smaller than the dia. of the one of the series chains of Standard GB/T4140, so the Series can match using the sprockets of Standard GB/T4140 directly.
 2. The Series feature a hinge width approx. twice that of the single hinge chains, so they have a much higher yield strength and are a heavy-duty chain, being mainly used on palletizers and heavy crate conveyor.
 3. When supplied, the standard length of each chain is 3.048m (10ft), totaling 80 links.

不锈钢单铰链式直输平顶链

Stainless Steel Single Hinge Straight Running Flat Top Chains

节距 P=36mm 36-CS80 36-CS90

Pitch P=36mm 36-CS80 36-CS90

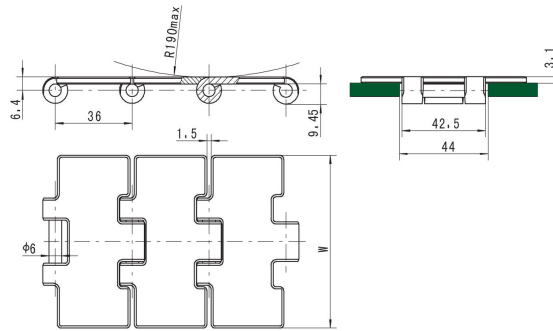

链号 Chain No.	链板 Plate			屈服强度 Yield Strength		重量 weight		
	材料 material	表面粗糙度 Surface finish μm	宽度 (Width)W		$\sigma_{0.2}$			
			mm	Inch	kN	lbf	kg/m	lb/ft
MS 36-CS80	马氏体型铬不锈钢	0.8	80	3 3/20	6.25	1,406	2.58	1.73
MS 36-CS90	Martensitic Chromium Stainless Steel		90	3 25/46			2.80	1.88
SS 36-CS80	铁素体型铬不锈钢	0.6	80	3 3/20	5.8	1,305	2.57	1.72
SS 36-CS90	Ferritic Chromium Stainless Steel		90	3 25/46			2.78	1.87
SSA 36-CS80	奥氏体型铬镍不锈钢	0.3	80	3 3/20	5.6	1,260	2.63	1.77
SSA 36-CS90	Austenitic Chromium-Nickel Stainless Steel		90	3 25/46			2.86	1.92

- 说明: 1. 链条节距为 36mm, 比标准链条的节距小;
 2. 同一宽度的链板有三种不同的材料可供选择, 以适应不同的工作场合;
 3. 供货时, 每条链条的标准长度为 2.88m, 计 80 节。

- Note: 1. The pitch of the chain is 36mm, smaller than the one of Standard chains.
 2. For the plates with a same width, there are 3 kinds of different materials to be available as an option, using to many different workplaces.
 3. When supplied, the standard length of each chain is 2.88m, totaling 80 links.